




DOPPELWIRKENDER STANDARDZYLINDER „CSFB“

CILINDRO STANDARD DOPPIO EFFETTO CSFB	PRESSIONE DI ESERCIZIO MAX 220 bar
STANDARD DOUBLE ACTING CYLINDER CSFB	WORKING PRESSURE MAX 220 bar
VERIEN DOUBLE EFFET STANDARD CSFB	PRESSION DE SERVICE MAX 220 bar
DOPPELTWIRKENDER STANDARDZYLINDER CSFB	BETRIEBSDRUCK MAX 220 bar
CILINDRO ESTANDARD DE DOBLE EFECTO CSFB	PRESION DE TRABAJO MAX 220 bar

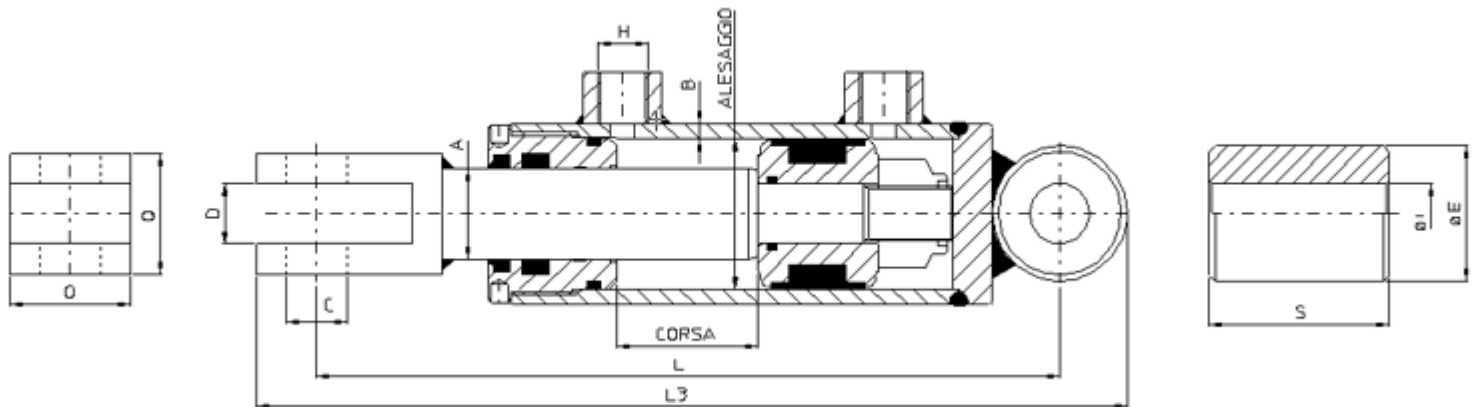

NUMMER	DURCHMESSER	A	HUB	L3	L	øi	øe	S	C	D	Q	B	H
CSFB 3018100	30	18	100	318	284,5	16	35	16,2	50	16	35	5	1/4"
CSFB 3018150	30	18	150	368	334,5	16	35	16,2	50	16	35	5	1/4"
CSFB 3018200	30	18	200	418	384,5	16	35	16,2	50	16	35	5	1/4"
CSFB 3018250	30	18	250	468	434,5	16	35	16,2	50	16	35	5	1/4"
CSFB 3018300	30	18	300	518	484,5	16	35	16,2	50	16	35	5	1/4"
CSFB 3018350	30	18	350	568	534,5	16	35	16,2	50	16	35	5	1/4"
CSFB 3018400	30	18	400	618	584,5	16	35	16,2	50	16	35	5	1/4"
CSFB 40--100	40	20-25	100	342	299,5	20	45	20,2	60	20	40	5	1/4"
CSFB 40--150	40	20-25	150	392	349,5	20	45	20,2	60	20	40	5	1/4"
CSFB 40--200	40	20-25	200	442	399,5	20	45	20,2	60	20	40	5	1/4"
CSFB 40--250	40	20-25	250	492	449,5	20	45	20,2	60	20	40	5	1/4"
CSFB 40--300	40	20-25	300	542	499,5	20	45	20,2	60	20	40	5	1/4"
CSFB 40--350	40	20-25	350	592	549,5	20	45	20,2	60	20	40	5	1/4"
CSFB 40--400	40	20-25	400	642	599,5	20	45	20,2	60	20	40	5	1/4"
CSFB 40--450	40	20-25	450	692	649,5	20	45	20,2	60	20	40	5	1/4"
CSFB 40--500	40	20-25	500	742	699,5	20	45	20,2	60	20	40	5	1/4"

CSFB 40--600	40	20-25	600	842	799,5	20	45	20,2	60	20	40	5	1/4"
CSFB 50--100	50	25-30	100	349	306,5	20	45	20,2	70	20	40	5	3/8"
CSFB 50--150	50	25-30	150	399	356,5	20	45	20,2	70	20	40	5	3/8"
CSFB 50--200	50	25-30	200	449	406,5	20	45	20,2	70	20	40	5	3/8"
CSFB 50--250	50	25-30	250	499	456,5	20	45	20,2	70	20	40	5	3/8"
CSFB 50--300	50	25-30	300	549	506,5	20	45	20,2	70	20	40	5	3/8"
CSFB 50--350	50	25-30	350	599	556,5	20	45	20,2	70	20	40	5	3/8"
CSFB 50--400	50	25-30	400	649	606,5	20	45	20,2	70	20	40	5	3/8"
CSFB 50--500	50	25-30	500	749	706,5	20	45	20,2	70	20	40	5	3/8"
CSFB 50--600	50	25-30	600	849	806,5	20	45	20,2	70	20	40	5	3/8"
CSFB 60--100	60	30-35-40	100	387	342	25	50	25,2	80	25	50	5	3/8"
CSFB 60--150	60	30-35-40	150	437	392	25	50	25,2	80	25	50	5	3/8"
CSFB 60--200	60	30-35-40	200	487	442	25	50	25,2	80	25	50	5	3/8"
CSFB 60--250	60	30-35-40	250	537	492	25	50	25,2	80	25	50	5	3/8"
CSFB 60--300	60	30-35-40	300	587	542	25	50	25,2	80	25	50	5	3/8"
CSFB 60--350	60	30-35-40	350	637	592	25	50	25,2	80	25	50	5	3/8"
CSFB 60--400	60	30-35-40	400	687	642	25	50	25,2	80	25	50	5	3/8"
CSFB 60--500	60	30-35-40	500	787	742	25	50	25,2	80	25	50	5	3/8"
CSFB 60--600	60	30-35-40	600	887	842	25	50	25,2	80	25	50	5	3/8"
CSFB 70--100	70	30-35-40	100	387	342	25	50	25,2	90	25	50	5	3/8"
CSFB 70--150	70	30-35-40	150	437	392	25	50	25,2	90	25	50	5	3/8"
CSFB 70--200	70	30-35-40	200	487	442	25	50	25,2	90	25	50	5	3/8"
CSFB 70--250	70	30-35-40	250	537	492	25	50	25,2	90	25	50	5	3/8"
CSFB 70--300	70	30-35-40	300	587	542	25	50	25,2	90	25	50	5	3/8"
CSFB 70--350	70	30-35-40	350	637	592	25	50	25,2	90	25	50	5	3/8"
CSFB 70--400	70	30-35-40	400	687	642	25	50	25,2	90	25	50	5	3/8"
CSFB 70--500	70	30-35-40	500	787	742	25	50	25,2	90	25	50	5	3/8"
CSFB 70--600	70	30-35-40	600	887	842	25	50	25,2	90	25	50	5	3/8"
CSFB 80--100	80	40-45-50	100	433	378	30	60	30,2	100	30	60	7,5	1/2"
CSFB 80--150	80	40-45-50	150	483	428	30	60	30,2	100	30	60	7,5	1/2"
CSFB 80--200	80	40-45-50	200	533	478	30	60	30,2	100	30	60	7,5	1/2"
CSFB 80--250	80	40-45-50	250	583	528	30	60	30,2	100	30	60	7,5	1/2"
CSFB 80--300	80	40-45-50	300	633	578	30	60	30,2	100	30	60	7,5	1/2"
CSFB 80--350	80	40-45-50	350	683	628	30	60	30,2	100	30	60	7,5	1/2"
CSFB 80--400	80	40-45-50	400	733	678	30	60	30,2	100	30	60	7,5	1/2"
CSFB 80--500	80	40-45-50	500	833	778	30	60	30,2	100	30	60	7,5	1/2"
CSFB 80--600	80	40-45-50	600	933	878	30	60	30,2	100	30	60	7,5	1/2"