



NSFL

FLANGE DI ANCORAGGIO	MATERIALE ST 52
HOLD DOWN FLANGES	MATERIAL ST 52
BRIDES D'ANCRAGE	MATERIAU ST 52
VERANKERUNGSFLANSCHEN	MATERIAL ST 52
BRIDAS DE FIJACION	MATERIAL ST 52


I VALORI C – G - H SONO FORNITI CON SOVRAMMETALLO

A MACHINING ALLOWANCE IS SUPPLIED ON VALUES C – G – H

LES VALEURS C – G – H SONT FOURNIES AVEC JUREPAISSEUR

DIE C – G – H WERTE VERSTEHEN SICH MIT BEARBEITUNGSZUGABE

LOS VALORES C – G – H SE DAN CON COPERTURA METALICA

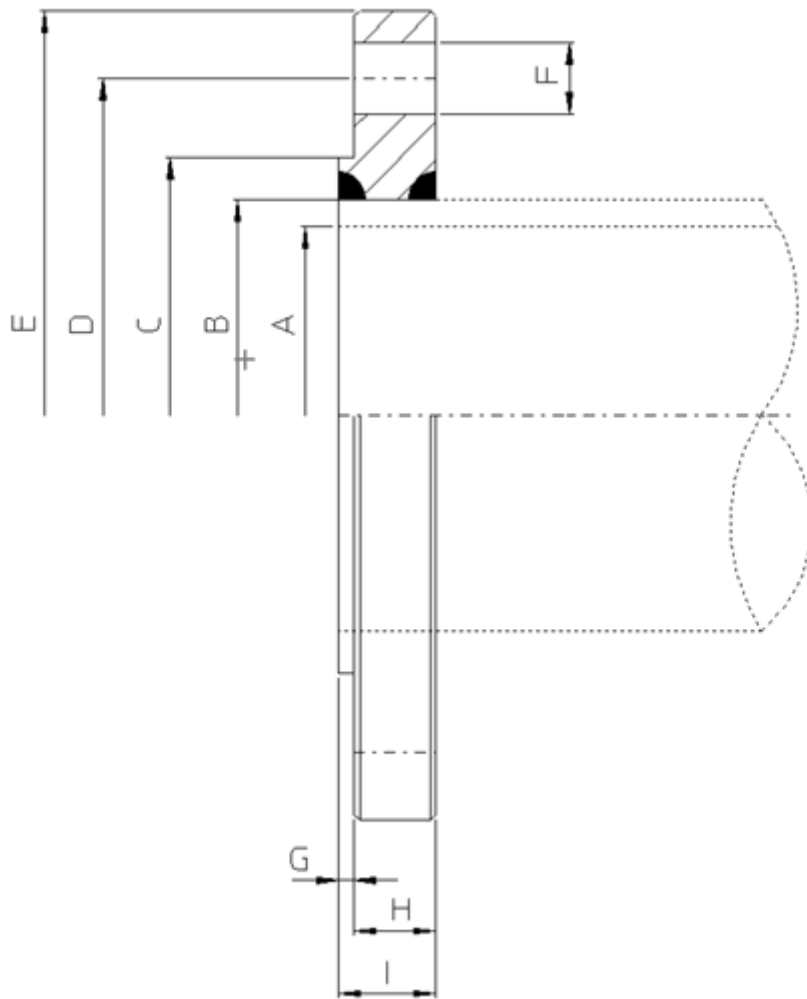

NUMMER	A	B	C	D	E	F	G	H	I
NSFL 30	30	39,5	55	78	99	N.4 FORI ø9	3	12	15
NSFL 40	40	49,5	65	88	109	N.4 FORI ø9	3	12	15
NSFL 50	50	59,5	75	98	119	N.4 FORI ø11	3	12	15
NSFL 60	60	69,5	85	108	129	N.4 FORI ø11	3	12	15
NSFL 70	70	79,5	95	124	149	N.4 FORI ø13	3	15	18
NSFL 80	80	94,5	110	134	164	N.4 FORI ø15	4	20	24
NSFL 90	90	104,5	120	148	178	N.4 FORI ø17	4	20	24
NSFL 100	100	114,5	130	158	188	N.4 FORI ø17	4	24	28

