




CILINDRO ESTANDARD DE DOBLE EFECTO CSBB

CILINDRO STANDARD DOPPIO EFFETTO CSBB	PRESIONE DI ESERCIZIO MAX 220 bar
STANDARD DOUBLE ACTING CYLINDER CSBB	WORKING PRESSURE MAX 220 bar
VERIEN DOUBLE EFFET STANDARD CSBB	PRESSIION DE SERVICE MAX 220 bar
DOPPELTWIRKENDER STANDARDZYLINDER CSBB	BETRIEBSDRUCK MAX 220 bar
CILINDRO ESTANDARD DE DOBLE EFECTO CSBB	PRESION DE TRABAJO MAX 220 bar

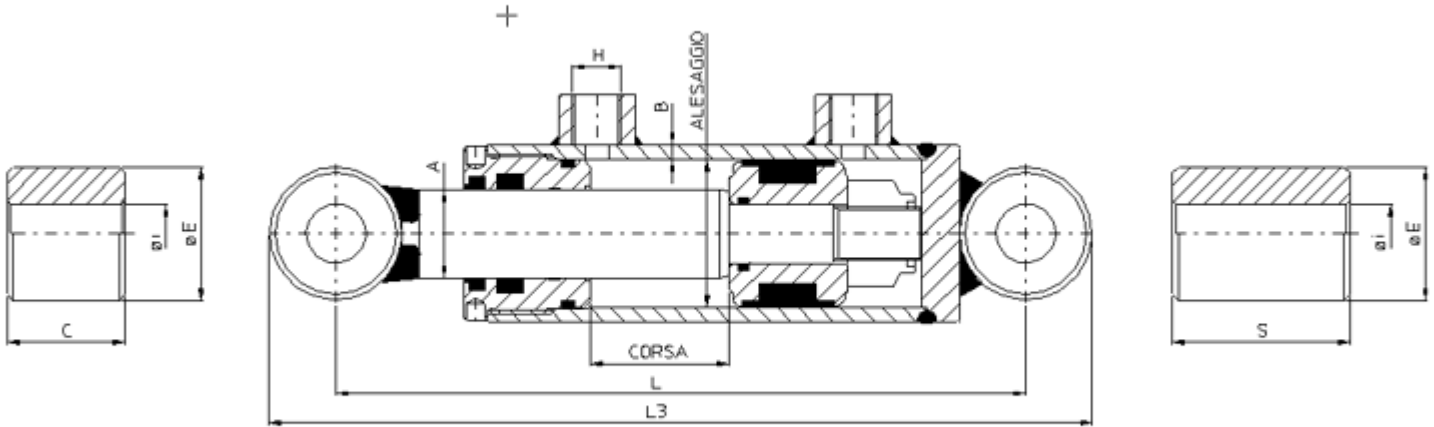

CODIGO	DIÁMETRO INTERIOR	A	CARRERA	L3	L	øi	øe	C	S	B	H
CSBB 3018100	30	18	100	296	261	16	35	30	50	5	1/4"
CSBB 3018150	30	18	150	346	311	16	35	30	50	5	1/4"
CSBB 3018200	30	18	200	396	361	16	35	30	50	5	1/4"
CSBB 3018250	30	18	250	446	411	16	35	30	50	5	1/4"
CSBB 3018300	30	18	300	496	461	16	35	30	50	5	1/4"
CSBB 3018350	30	18	350	546	511	16	35	30	50	5	1/4"
CSBB 3018400	30	18	400	596	561	16	35	30	50	5	1/4"
CSBB 40--100	40	20-25	100	320	275	20	45	30	60	5	1/4"
CSBB 40--150	40	20-25	150	370	325	20	45	30	60	5	1/4"
CSBB 40--200	40	20-25	200	420	375	20	45	30	60	5	1/4"
CSBB 40--250	40	20-25	250	470	425	20	45	30	60	5	1/4"

CSBB 40--300	40	20-25	300	520	475	20	45	30	60	5	1/4"
CSBB 40--350	40	20-25	350	570	525	20	45	30	60	5	1/4"
CSBB 40--400	40	20-25	400	620	575	20	45	30	60	5	1/4"
CSBB 40--450	40	25-30	450	670	625	20	45	30	60	5	1/4"
CSBB 40--500	40	25-30	500	720	675	20	45	30	60	5	1/4"
CSBB 40--600	40	25-30	600	820	775	20	45	30	60	5	1/4"
CSBB 50--100	50	25-30	100	327	282	20	45	40	70	5	3/8"
CSBB 50--150	50	25-30	150	377	332	20	45	40	70	5	3/8"
CSBB 50--200	50	25-30	200	427	382	20	45	40	70	5	3/8"
CSBB 50--250	50	25-30	250	477	432	20	45	40	70	5	3/8"
CSBB 50--300	50	25-30	300	527	482	20	45	40	70	5	3/8"
CSBB 50--350	50	25-30	350	577	532	20	45	40	70	5	3/8"
CSBB 50--400	50	25-30	400	627	582	20	45	40	70	5	3/8"
CSBB 50--500	50	25-30	500	727	682	20	45	40	70	5	3/8"
CSBB 50--600	50	25-30	600	827	782	20	45	40	70	5	3/8"
CSBB 60--100	60	30-35-40	100	365	315	25	50	50	80	5	3/8"
CSBB 60--150	60	30-35-40	150	415	365	25	50	50	80	5	3/8"
CSBB 60--200	60	30-35-40	200	465	415	25	50	50	80	5	3/8"
CSBB 60--250	60	30-35-40	250	515	465	25	50	50	80	5	3/8"
CSBB 60--300	60	30-35-40	300	565	515	25	50	50	80	5	3/8"
CSBB 60--350	60	30-35-40	350	615	565	25	50	50	80	5	3/8"
CSBB 60--400	60	30-35-40	400	665	615	25	50	50	80	5	3/8"
CSBB 60--500	60	30-35-40	500	765	715	25	50	50	80	5	3/8"
CSBB 60--600	60	30-35-40	600	865	815	25	50	50	80	5	3/8"
CSBB 70--100	70	30-35-40	100	365	315	25	50	50	90	5	3/8"
CSBB 70--150	70	30-35-40	150	415	365	25	50	50	90	5	3/8"
CSBB 70--200	70	30-35-40	200	465	415	25	50	50	90	5	3/8"
CSBB 70--250	70	30-35-40	250	515	465	25	50	50	90	5	3/8"
CSBB 70--300	70	30-35-40	300	565	515	25	50	50	90	5	3/8"
CSBB 70--350	70	30-35-40	350	615	565	25	50	50	90	5	3/8"
CSBB 70--400	70	30-35-40	400	665	615	25	50	50	90	5	3/8"
CSBB 70--500	70	30-35-40	500	765	715	25	50	50	90	5	3/8"
CSBB 70--600	70	30-35-40	600	865	815	25	50	50	90	5	3/8"
CSBB 80--100	80	40-45-50	100	401	341	30	60	60	100	7,5	1/2"
CSBB 80--150	80	40-45-50	150	451	391	30	60	60	100	7,5	1/2"
CSBB 80--200	80	40-45-50	200	501	441	30	60	60	100	7,5	1/2"
CSBB 80--250	80	40-45-50	250	551	491	30	60	60	100	7,5	1/2"

CSBB 80--300	80	40-45-50	300	601	541	30	60	60	100	7,5	1/2"
CSBB 80--350	80	40-45-50	350	651	591	30	60	60	100	7,5	1/2"
CSBB 80--400	80	40-45-50	400	701	641	30	60	60	100	7,5	1/2"
CSBB 80--500	80	40-45-50	500	801	741	30	60	60	100	7,5	1/2"
CSBB 80--600	80	40-45-50	600	901	841	30	60	60	100	7,5	1/2"